


LumiSun™-50 Class AAA LED Solar Simulator

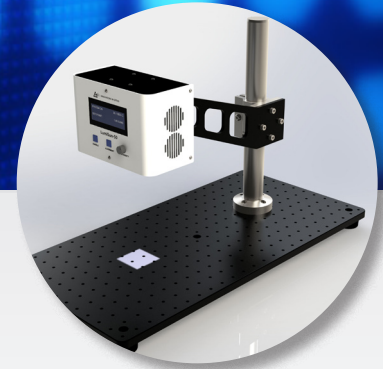

The LumiSun-50 is a high power, multi-wavelength LED solar simulator that meets IEC 60904-9 Class AAA for spectral match, uniformity of irradiance, and temporal stability. Primary applications for the LumiSun-50 are terrestrial photovoltaic testing and PV research.

The LumiSun-50 achieves a spatially uniform illumination field by combining our chip-on-board (COB) LED technology with efficient, non-imaging, homogenizing optics and a precision re-imaging lens system. The field of illumination is 50 x 50 mm at a working distance of 183 mm. The LumiSun-50 includes a driver/controller which individually provides constant current to each die in the COB array.

The LED light source of the LumiSun-50 is contained within an air-cooled housing that can rotate the angular beam alignment. Adjustment and setting of the optimum light path working distance is visually facilitated by a converging pair of red dot laser pointers.

Features and Benefits:

- IEC Class AAA
- 50 X 50 mm illumination area
- Irradiance levels from 0.1 to 1.1 suns
- Variable beam output direction
- Instant on
- Long LED lifetime
- Low power, low heat
- Mercury and ozone free


Included Components:

- LumiSun-50 LED Solar Simulator
- Driver/controller
- Cables
- Variable height adjustment mount
- Optical breadboard baseplate


SPECIFICATIONS

Parameter	Specification	Comment
Solar simulator class	AAA	IEC60904-9 2007
Illumination area	2 inches x 2 inches (50 mm x 50 mm)	At working distance
Working distance	183 mm	Beam aperture to test surface
Total irradiance	1.1 suns	Dimmable to 0.1 suns
Dimensions	177W x 125H x 92D (mm)	Without mounting hardware
Weight	2 Kg	Without mounting hardware
Power input	Universal AC	<200W power consumption
Lifetime (Hours)	10,000 Hours	Typical


CLASS A SPECTRAL MATCH

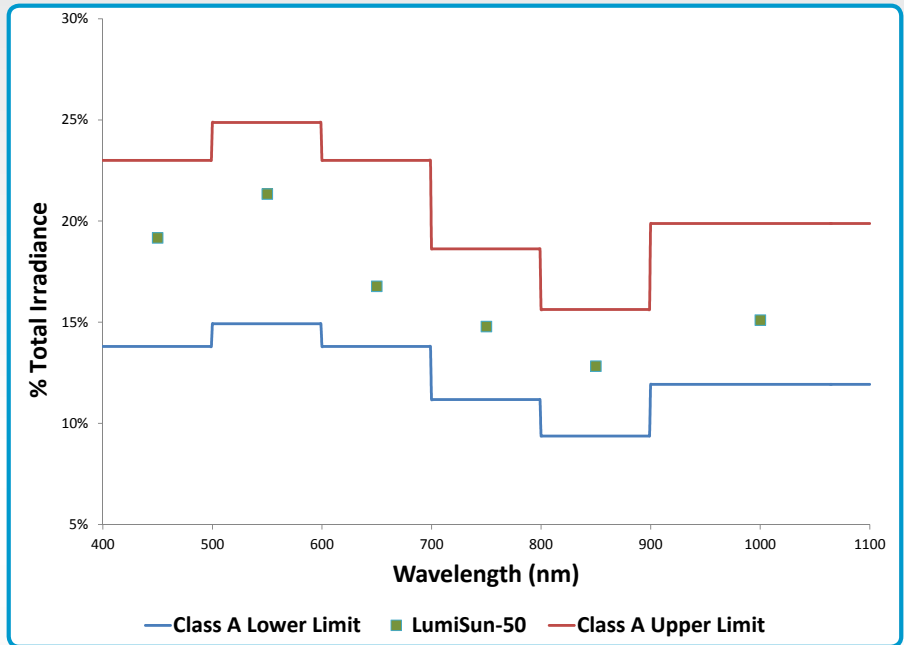

DIMENSIONS

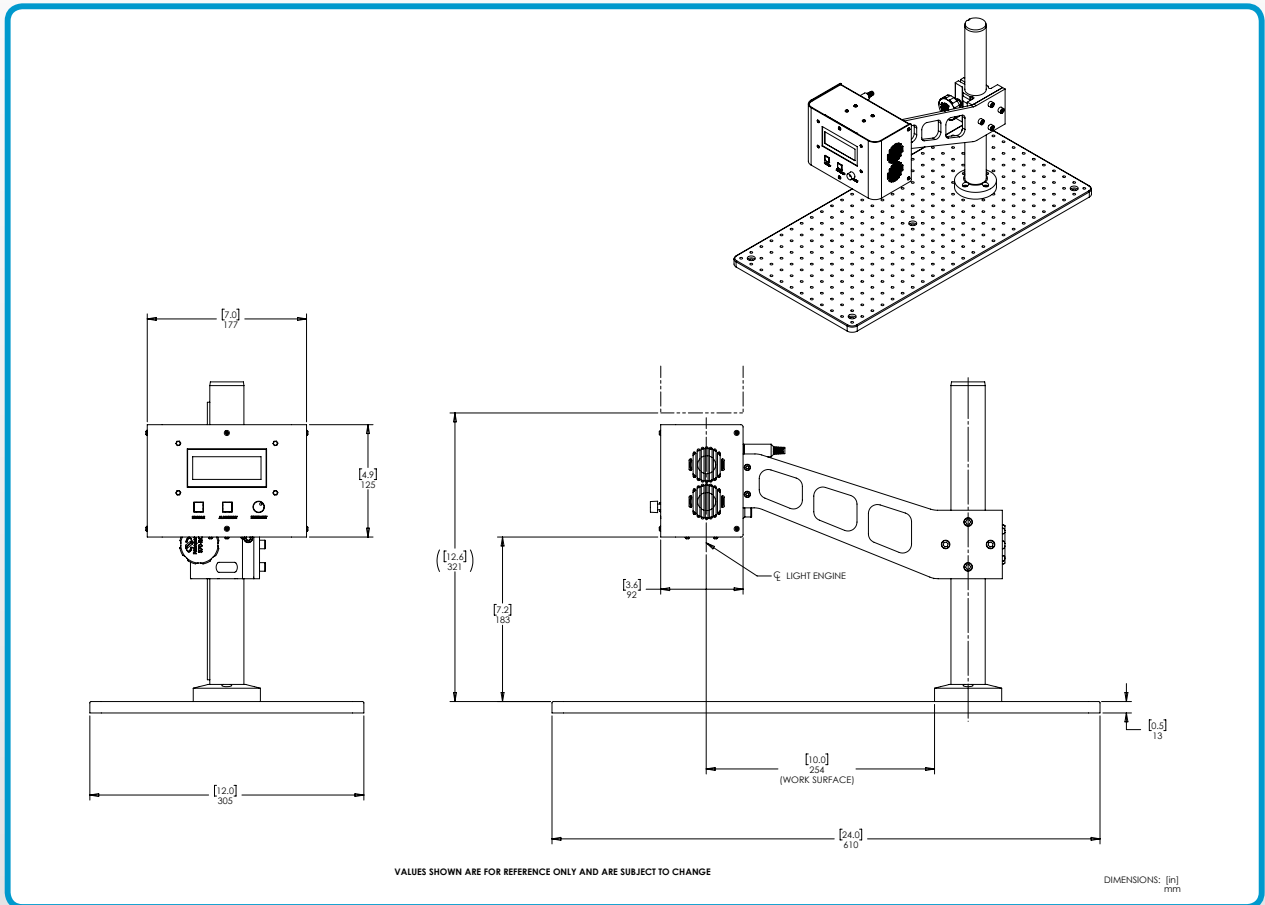

LUMISUN-50 CLASS AAA LED SOLAR SIMULATOR

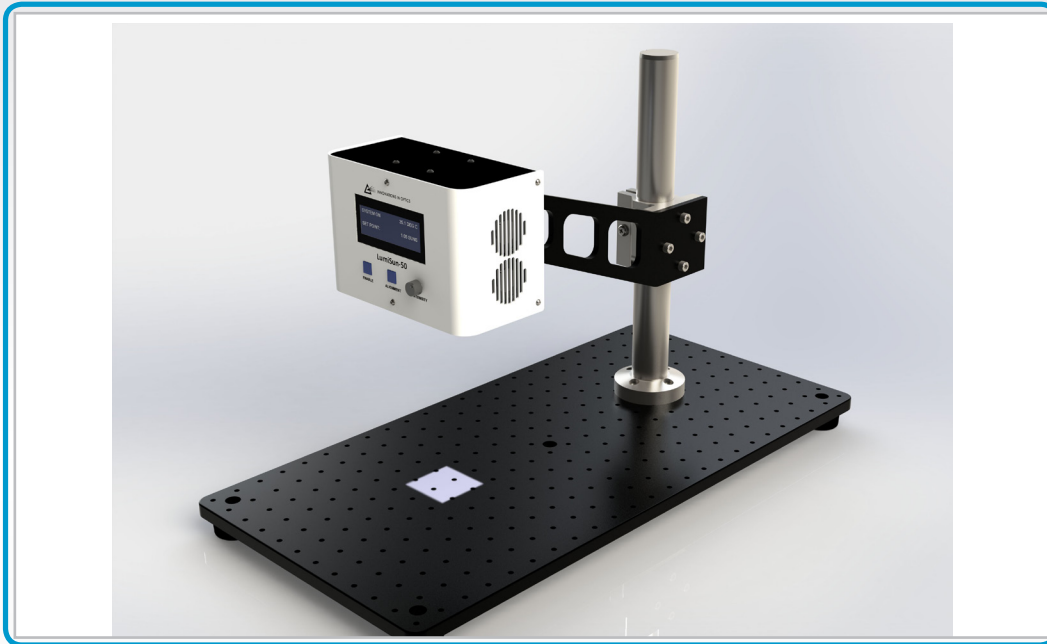

The products, their specifications and other information appearing in this document are subject to change by Innovations in Optics, Inc. (IOI) without notice. IOI assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. IOI product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by IOI of any intellectual property rights that IOI may have in such information. LumiSun-50™ is a trademark of IOI, all rights reserved. This product is protected by U.S. Patents and Patents Pending in the U.S. and other countries.



INNOVATIONS IN OPTICS

82 Cummings Park, Woburn, MA 01801
P: (781) 933-4477 F: (781) 933-0007

www.innovationsinoptics.com
sales@innovationsinoptics.com

Copyright © 2016 Innovations in Optics. All rights reserved.

DS-LumiSun-50-160930