


# LumiBright™ UV 1700A-100

The versatile and powerful UV LumiBright Fiber Coupled devices are ideal for fiber optic applications in industrial, medical, and laboratory equipment. The couplers incorporate LumiBright Light Engines with interfaces for light guides or fiber bundles. Chip-on-Board LED technology with metallic PCB substrates offers excellent thermal performance.

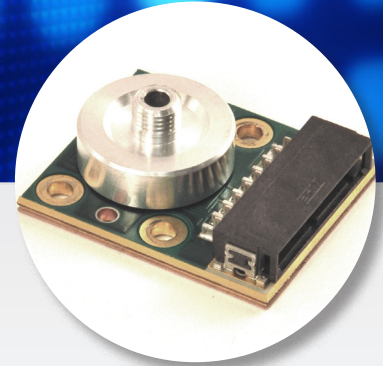

The Model UV 1700A-100 supports up to a 2 mm fiber bundle using an SMA 905 connector. There are options for 1 to 4 UV LED die in single or multi wavelength configurations. An onboard thermistor is included allowing real-time monitoring of temperature for closed-loop control.

### Benefits:

- Intense and stable optical power
- Small footprint
- Continuous high current or pulsed operation
- RoHS compliant - Environmentally friendly

### ULTRAVIOLET:

- $\lambda_p$  365 nm thru 405nm

### Features:

- Flexible fiber connector - 1mm - 2mm
- High thermal conductivity metal core PCB
- COB array technology, 1 or 4 Die
- Patent-pending technology

### Options:

- Single or multi wavelength configurations
- Fiber bundles or light guides
- Heat sink and thermal pads
- Drivers and controllers

### Typical Applications:

#### ULTRAVIOLET:

- General fluorescence excitation
- Medical fluorescence imaging
- Phototherapy
- Machine vision
- UV curing
- Industrial borescopes
- High uniformity spot light
- Laser and arc lamp replacement

### Table of Contents

Product Specifications.....2  
 Installation Control Drawing.....3  
 Accessories.....3

**SPECIFICATIONS**

The LumiBright UV 1700A-100 is a fiber coupled device with a choice of a single or multi-wavelength PCB using our standard 42 mil die. Peak wavelengths available are from 365 nm thru 405 with up to three independent wavelength combinations allowing for flexibility and customization.

The data below is provided as a general guideline for the 4 die configuration.

*Caution: Never connect your unit to an open circuit voltage that is more than 1 Volt above the recommended maximum voltage.*

Table 1

Assembly	Max. Number of 42 mil Die	Numerical Aperture (NA)
1700A-100	4	N/A

Products are tested using a PGR thermal pad and mounted on a heatpipe.


Maximum drive conditions for the LumiBright UV 1700A-100:

Bin	Current (Amps)	Voltage (V <sub>p</sub> )	Electrical Power (Watts)	Optical Power (mW)
A3				
UV ( $\lambda_p$ 360-365 nm)	-	-	-	-
A4				
UV ( $\lambda_p$ 365-370 nm)	-	-	-	-
A5				
UV ( $\lambda_p$ 370-375 nm)	-	-	-	-
A8				
UV ( $\lambda_p$ 385-390 nm)	-	-	-	-
B0				
UV ( $\lambda_p$ 395-400 nm)	-	-	-	-
B1				
UV ( $\lambda_p$ 400-405 nm)	-	-	-	-

Parameter	Nominal Drive Conditions		Comment
	Min	Max	
Available peak $\lambda$ 's	360 nm	420 nm	Not all $\lambda$ 's in stock (Contact Sales Engineer)
Thermal impedance	-	<1.0 °C/W	Typical for 1 die
Thermistor B <sub>25/85</sub>	3574	3646	For 10 k $\Omega$
Thermistor impedance	-	10 k $\Omega$	Others available upon request
Available die size	11 mils	60 mils	Standard size 42 mil
Operating temperature	-40 °C	85 °C	Depending on drive conditions
Lifetime (Hours)	-	-	Depends on drive conditions


**INSTALLATION CONTROL DRAWING**

Figure 1

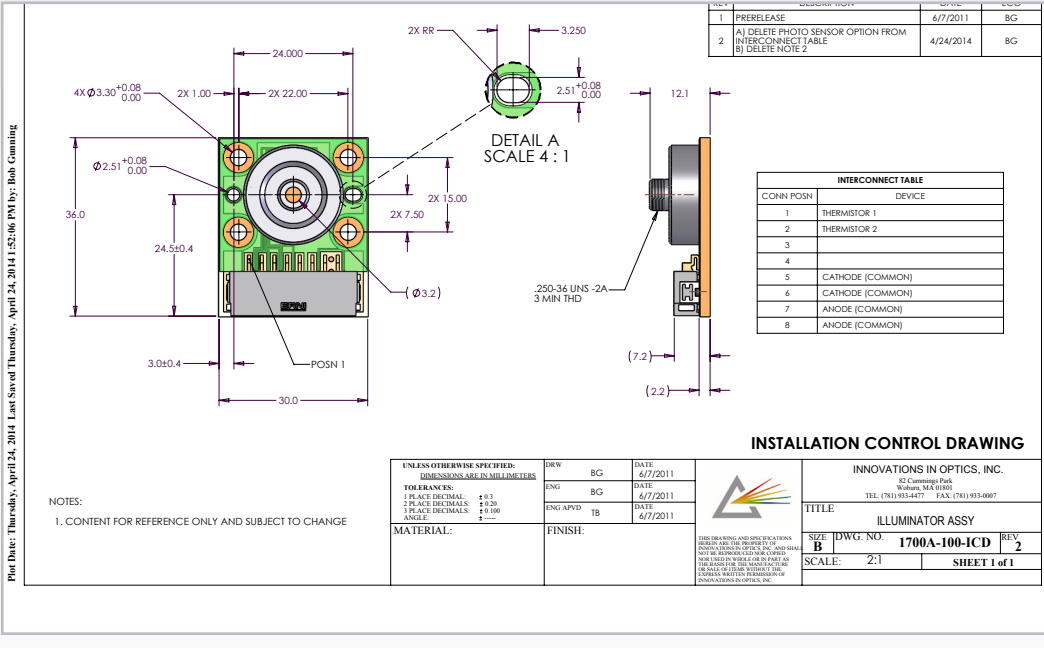

**ACCESSORIES**

Figure 2

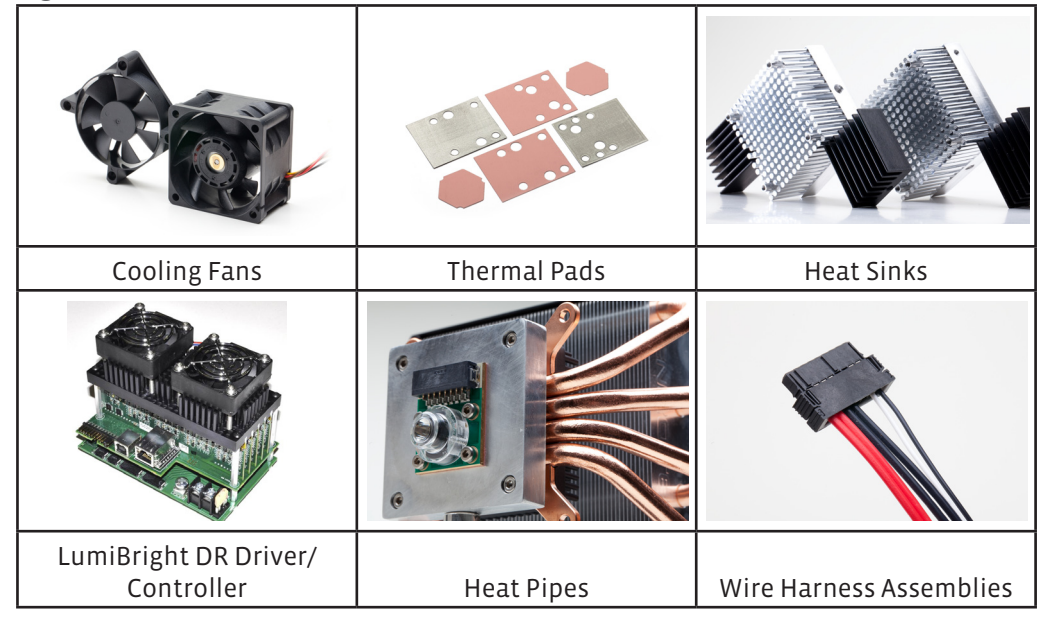

The products, their specifications and other information appearing in this document are subject to change by Innovations in Optics, Inc. (IOI) without notice. IOI assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. IOI product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by IOI of any intellectual property rights that IOI may have in such information. LumiBright™ is a trademark of IOI, all rights reserved. This product is protected by U.S. Patents and Patents Pending in the U.S. and other countries.