




LumiBright™ UV 2400B-500

LumiBright Ultraviolet Light Engines provide extreme brightness and a highly uniform light distribution. Chip-on-Board LED technology with metallic PCB substrates offers excellent thermal performance. The specialized glass primary optic is ideal for high power UV light. It is a non-imaging concentrator that delivers high collection efficiency and a homogeneous beam requiring no additional optics.

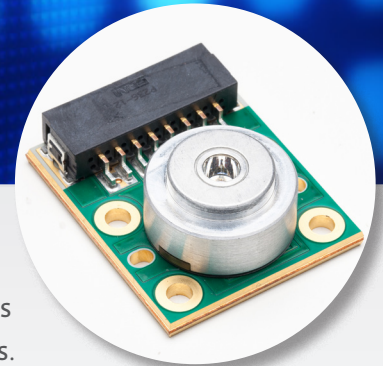

The Model LE 2400B-500 produces a 37-degree half angle beam from a 5-mm diameter aperture with options for 7 LED die in single or multi-wavelength configurations. An on-board thermistor (included) allows real-time monitoring of temperature for closed-loop control.

Benefits:

- Uniform near and far fields
- Fused silica optics for UV, high power, and high temperature operations
- Continuous high current or pulsed operation
- RoHS compliant - Environmentally friendly

ULTRAVIOLET:

- λ_p 365 nm thru 405

Features:

- 37 degree half angle far field
- 5.0 mm output diameter
- High thermal conductivity metal core PCB
- COB array technology, 7 Die
- Patent-pending non-imaging optics

Options:

- Single or multi-wavelength configurations
- Heat sink and thermal pads
- Drivers and Controllers

Typical Applications:

ULTRAVIOLET:

- UV curing
- High speed printing
- Document verification
- Water and air purification
- Medical phototherapy
- Fluorescence excitation
- Mercury lamp replacement
- Machine vision

Table of Contents

Product Specifications.....2

Notes.....2

Charts.....3

Installation Control Drawing.....4

Accessories.....4

SPECIFICATIONS

Parameter	Specification	Comment
Number of LED die	7	Connected in parallel, chip-on-board
Drive current	20A Maximum	Continuous operation
*Forward voltage	Turn on: 3.0V Limit: 4.8V	Requires constant current operation
UV optical power	> 16 Watts	At max current
UV optical power density	> 95 W/cm ²	At exit aperture, max current
Clear aperture (CA ₀)	4.8 mm	At exit aperture
Far field angle	37°	-
Numerical aperture (NA ₀)	0.60	-
Electrical connector	1 row, 8 pin	Surface mount, high current
Overall size (mm)	30 x 36 x 11.7	W x L x H
PCB Thermal impedance	0.45° C/W	-
Thermistor B _{25/85}	3574 to 3646	For 10 kΩ
Thermistor impedance	10 kΩ	At 25° C
Operating temperature	15° C to 45° C	<85% RH, non-condensing
Lifetime (hours)	-	Depending on drive conditions and temperature

*Note: Drive circuits must prevent exceeding the maximum recommended open circuit voltage for any LED die.

NOTES

Notes on Lightguide Coupling

The 2400B-500 can easily couple to liquid light guides and fiber bundles. The aperture and half-angle of the 2400B-500 matched the diameter and numerical aperture of typical light guides. The light guide ferrule can be butt-coupled to the solid-glass aperture of the 2400B-500. No additional optics are necessary.

The maximum coupling efficiency for the Model 2400B-500 requires the use of a fiberoptic or liquid lightguide with equivalent specifications for both the nominal values of Numerical Aperture (NA₀) and Clear Aperture (CA₀). When the lightguide design parameters of NA_f or CA_f are smaller than the nominal values of the Model 2400B-500, the coupling efficiency is reduced by the square of the ratios, (NA_f/NA₀)² and/or (CA_f/CA₀)². Other factors that contribute to coupling efficiency are the reflectance loss at the face of the fiberoptic or lightguide, as well as the packing fraction when using a fiber bundle.

Notes on Thermal Management

The 2400B-500 uses a metal core circuit board for high thermal conductivity that allows heat to dissipate in all directions. An external heat sink or heat pipe is required to dissipate the heat generated at full drive power. Adding the feature of forced air convection across the heat sink or heat pipe fins removes heat faster and more efficiently. The 2400B-500 circuit board features an attached thermal pad for heat sink contact, no thermal grease is needed. Every 2400B-500 circuit board has a built-in thermistor for temperature monitoring. Lifetime of the LEDs will be compromised if the temperature of the circuit board exceeds 70° C.

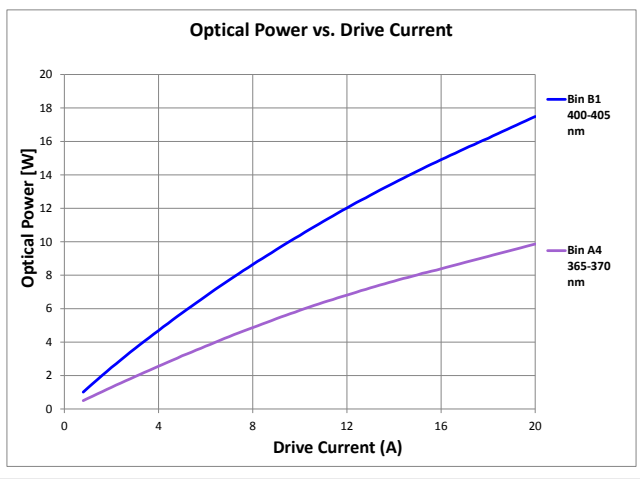


Figure 1

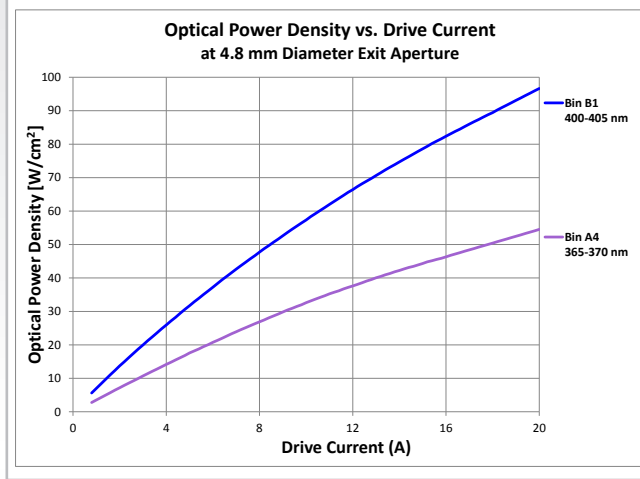


Figure 2

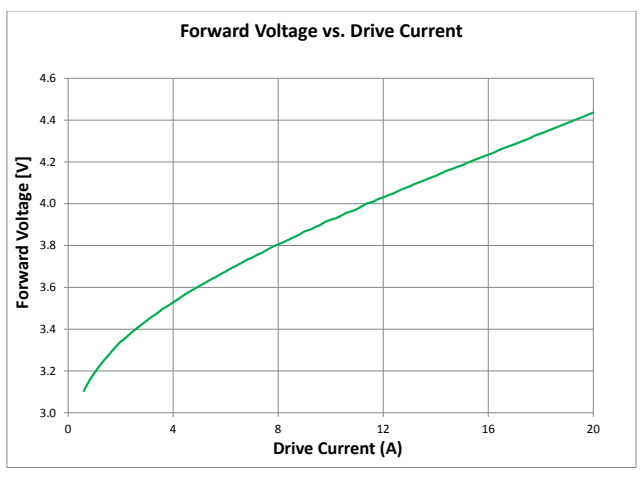


Figure 3

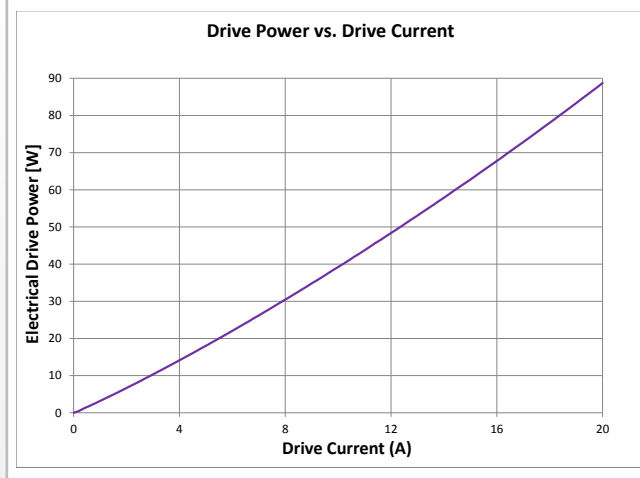


Figure 4

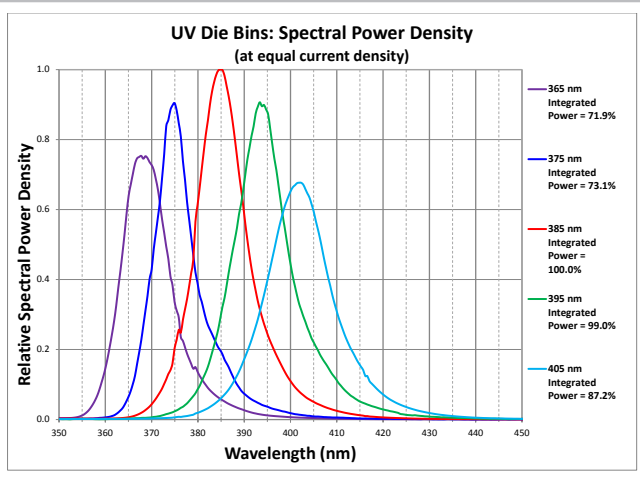


Figure 5

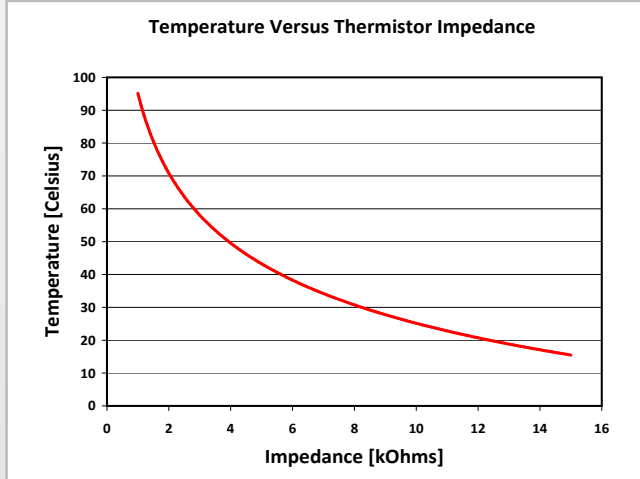


Figure 6

INSTALLATION CONTROL DRAWING

Plot Date: Tuesday, November 22, 2016 Last Saved Tuesday, November 22, 2016 9:06:06 AM by: M45010-1

REVISIONS			
REV	DESCRIPTION	DATE	ECO
1	PRERELEASE	6/10/2011	BG
2	A) (7.2) WAS (7.5); (2.2) WAS (2.4) B) 11.7 MAX WAS 12 MAX	6/8/2013	BG
3	A) DELETE PHOTO SENSOR OPTION FROM INTERCONNECT TABLE B) DELETE NOTE 2	4/22/2014	BG

INTERCONNECT TABLE	
CONN POSN	DEVICE
1	THERMISTOR
2	THERMISTOR
3	VACANT
4	VACANT
5	CATHODE (COMMON)
6	CATHODE (COMMON)
7	ANODE (COMMON)
8	ANODE (COMMON)







INSTALLATION CONTROL DRAWING

<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCES: 1 PLACE DECIMAL: ± 0.3 2 PLACE DECIMALS: ± 0.20 3 PLACE DECIMALS: ± 0.100 ANGLE: ± 0.000</p>	<p>DRW: BG ENG: BG ENG APVD: TB</p>	<p>DATE: 6/10/2011 DATE: 6/10/2011 DATE: 6/10/2011</p>	<p>INNOVATIONS IN OPTICS, INC. 82 Cummings Park Woburn, MA 01801 TEL: (781) 933-4477 FAX: (781) 933-0007</p> <p>TITLE: LUMIBRIGHT ASSY, 40 DEG, 5MM (GLASS)</p> <p>SIZE: B DWG. NO. 2400B-500-ICD REV 3</p> <p>SCALE: 2:1 SHEET 1 of 1</p>
--	---	--	--

NOTES:
1. CONTENT FOR REFERENCE ONLY AND SUBJECT TO CHANGE

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF INNOVATIONS IN OPTICS, INC. AND SHALL NOT BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF INNOVATIONS IN OPTICS, INC.

ACCESSORIES

		
Cooling Fans	Thermal Pads	Heat Sinks
		
LumiBright DR Driver/ Controller	Heat Pipes	Wire Harness Assemblies

The products, their specifications and other information appearing in this document are subject to change by Innovations in Optics, Inc. (IOI) without notice. IOI assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. IOI product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by IOI of any intellectual property rights that IOI may have in such information. LumiBright™ is a trademark of IOI, all rights reserved. This product is protected by U.S. Patents and Patents Pending in the U.S. and other countries.